

Manual for using EDC17C84 probe with CMDFlash.



1. Description: This probe can be used for programming Renault / Nissan EDC17C84 ECUs with CMDFlash. It fits in most BDM positioning frames and is fitted with LEDs for accurate alignment on the ECU.

The probe is fitted with switches that allow the circuit to be changed for password reading (CMD BMW Fxx plugin + BSM interface are required) and programming over boot mode.

There is no need for soldering to the ECU at all!

2. Handling and adjustment:

In order to use this probe, you must have our BSM interface which generates the BT2 and BT3 signals. The label shows the assignment of the connections:




Place the probe into the BDM frame retaining bracket and tighten the screws. Attach one end of the BSM interface to the probe, then connect the other side to the CMDFlash + Tricore interface. Now power the CMDFlash and the BSM interface using the CMD power supply with the supplied splitter.

If lighting is required you can connect a 12V power supply to the jack on the probe (this only powers the LEDs and not the ECU). It is possible to use the CMD power supply to power the LEDs temporarily whilst aligning, once aligned you can return the power supply back into the CMD interface.


Move the retainer carefully towards the ECU and ensure that all pins are in their designated position. A detailed diagram showing the location of the connections can be found at the end of this manual.

3. Read password: Position the DIP switches as pictured below. All switches UP except the last one on the right, which should be DOWN. You can now read the password.

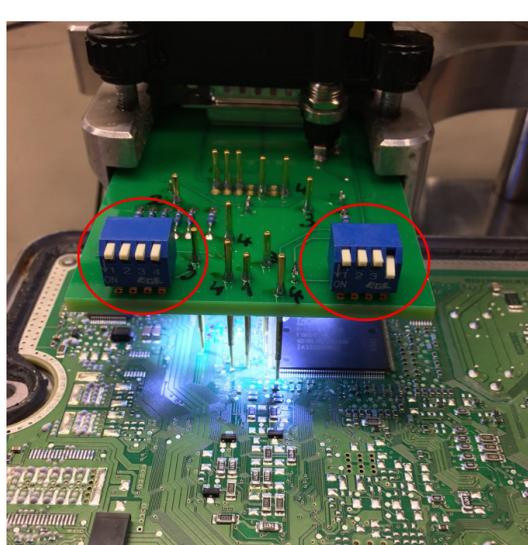


Probe set to password reading mode.

4. Programming the ECU: Position the DIP switches as pictured below. All switches on the left DOWN, the outer 2 switches on the right DOWN and the centre switches on the right UP. You can now proceed with programming.

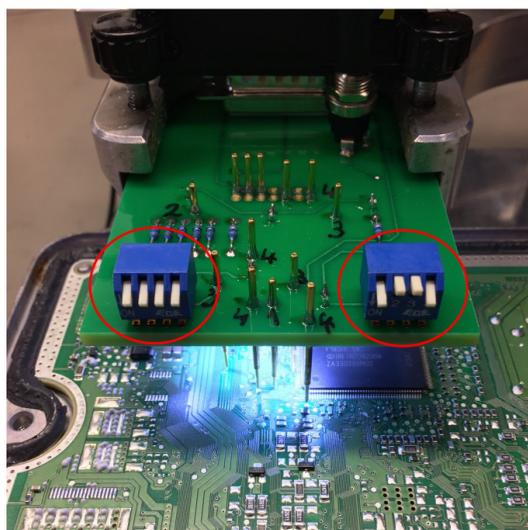

Probe set to boot programming mode.

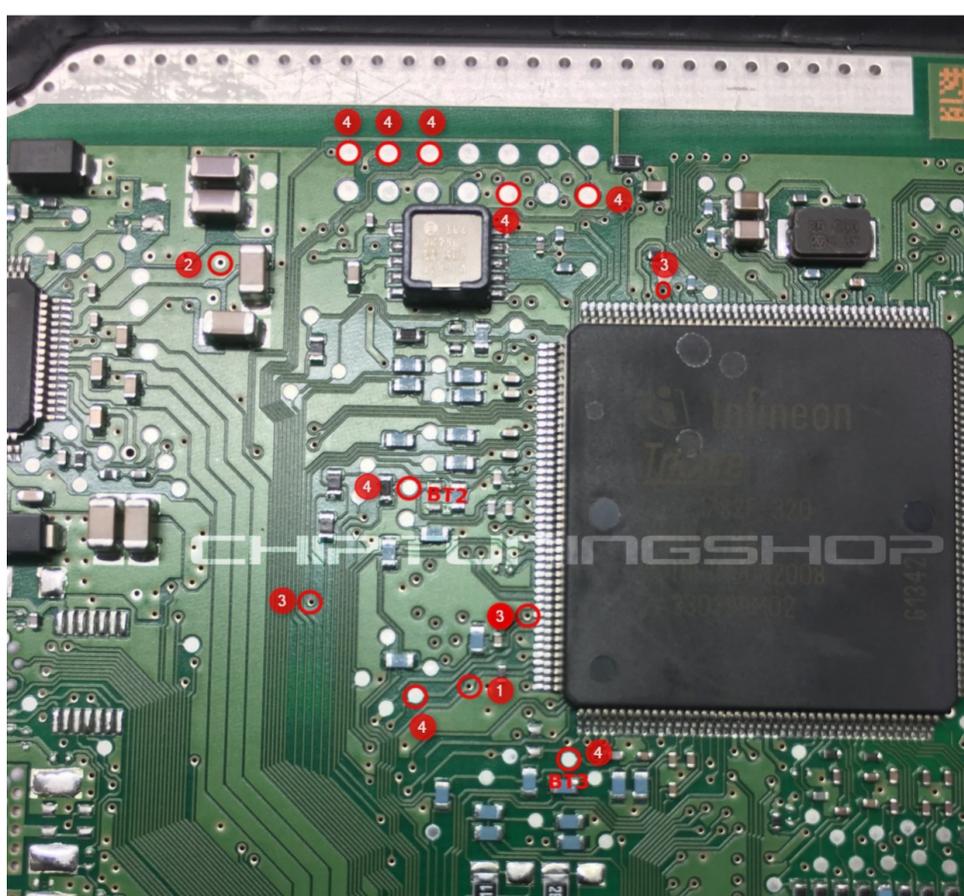

The pads marked in red have to make contact with the probe. The pins on the probe are fitted at 4 different heights, the numbers show the 3 stages in which the probe hits the ECU.

Technical alterations reserved!

Copyright by www.chiptuningshop.co.uk

This product should be operated by competent personnel only. Chiptuningshop Ltd do not accept any responsibility for damages, direct or consequential caused by improper handling.